

V CHANGER

The V Changer is Premier's latest system of pallet exchange without the manual handling of the actual pallet.

It will handle any conventional sized pallet with bottom boards and will transfer loads ranging from 60cm to 205cm in height.

Tipping the load back into a 'V' format is an excellent method of retaining the integrity of the stack while returning the pallet to floor level.







USES INCLUDE

- Load transfer from wood to hygienic in-house pallets
- Switching outgoing loads to shipping or one-way pallets
- Handling loads which must remain the original way up after transfer
- Suitable for block stacked loads rather than sacks

KEY FEATURES

- Pallet Latch system adjusts to suit pallets
- 110° tilt with V profile
- Flush-to-floor loading, no ramp
- Smooth, effective, semi-auto controls
- Guarding adaptable to suit the location

Method of operation



Loading at floor level. Pallet securely latched as the machine tips.



The load is safely tipped back 110 degrees.





New pallet lifted to the underside of the stack, then the whole load returns to floor level.




V CHANGER

Specifications

Usable Jaw Opening	Max 2050n Min 600n
	Larger jaw opening models can be b
Standard Load Table	1200mm x 1200n
Loading Capacity	1400
Power Supply	3ph / 400V / 32 a
Motor Size	4
Weight	Approx 1600 l
Weight of complete set of guards	350 I
Controls	Semi-automatic hold-to-run push button cont Full automatic available as an opt
Actual	A Width 2.5
Operating	B Depth 4.5
Space	C Height 3.1
Standard Shipping	Width 3.4
Dimensions	Depth 2.1.
(machine only)	Height 2.3.

SIDE ELEVATION PLAN VIEW

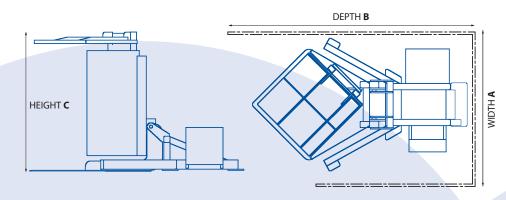



Gressenhall Dereham Norfolk NR20 4DT

Tel : +44 (0)1362 861066 Email : sales@premierpal.co.uk

Web: www.premierpalletinverter.co.uk